

24W Circular Light



MAHABELL



Model : MB-CIR300-24W

Applications : Widely used in Homes, Offices, Hotels, Restaurants, Supermarkets, Shopping Malls, etc.

Electrical Parameters

Input Voltage	100-285V AC
Rated Power	24W
Efficiency	>85%
Power Factor	>0.90
Harmonics	<15%

LED Details

Mounting Type	Suspended
Led Viewing Angle	120 degrees
Colour Temperature (cct)	3000k/4000k/6500k
Lumens	85 Lm/ W
Luminous Flux	2400 lm
CRI	>80

Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20


Luminary Housing Details

Body	CRCA
Heat Sink	Aluminium
Diffuser	PS

Certifications

ROHS | Yes

Dimensions

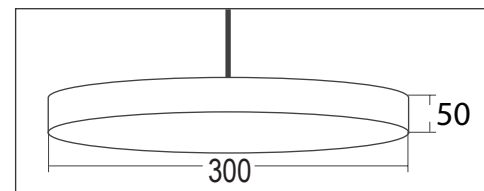

Light distribution

