


## 15W Cylindrical Downlight

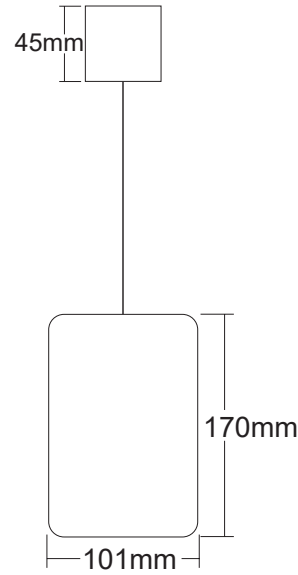

Model : MB-DLS-15W

**Applications :** Widely used in Homes, Offices, Hotels, Restaurants, Supermarkets, Shopping Malls, etc.

### Luminary Housing Details

Body	Aluminium Housing
Heat Sink	Aluminium
Diffuser	PMMA

### Dimension

Outer Dia	Φ 101mm
Height	Φ 170mm

### Certifications

ROHS	Yes
------	-----

### Electrical Parameters

Input Voltage	100-285V AC
Rated Power	15W
Efficiency	>85%
Power Factor	>0.90
Harmonics	<15%

### LED Details

Mounting Type	Recess
Led Viewing Angle	120 degrees
Colour Temperature (cct)	3000k/4000k/6500k
Lumens	80 Lm/ W
Luminous Flux	1200 lm
CRI	>80

### Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
Dust And Water Protection	IP20

### Light distribution :-

