


# 30W Hexagonal Panel Light



MAHABELL

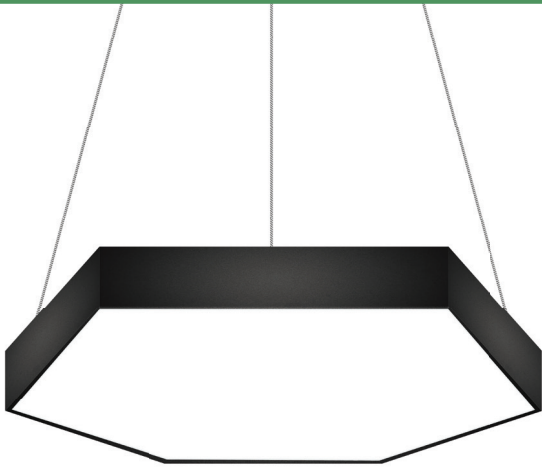

Model : MB-PLHX-30W

**Applications:** Widely used in Offices, Hotels, Supermarkets, Shopping Malls, etc.

### Electrical Parameters

Input Voltage	100-285V AC
Rated Power	30W
Efficiency	>90%
Power Factor	>0.90
Harmonics	<10%

### LED Details

Mounting Type	Suspended
Led Viewing Angle	110 degrees
Colour Temperature (CCT)	3000k/4000k/6500k
Lumens	98 Lm/W
Luminous Flux	2850 lm
CRI	>80

### Features

- Super bright output indoor lights
- Equipped with non- flickering drivers & high lumens SMDLED chip with lens
- Long life span up to 50k hours, low decay & low maintenance
- High efficiency PMMA & even light distribution
- Dimmable driver supports for all products
- Wattage and Lumens As per Customised Sizes and Design.

30 W

Dimension:  
600mmx300mm (each side )x46.5mm

### Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
IP Rating	IP20


### Luminary Housing Details

Body	CRCA Enclosure
Diffuser	PC Cover


### Certifications

ROHS	Yes
------	-----

### Light distribution :-

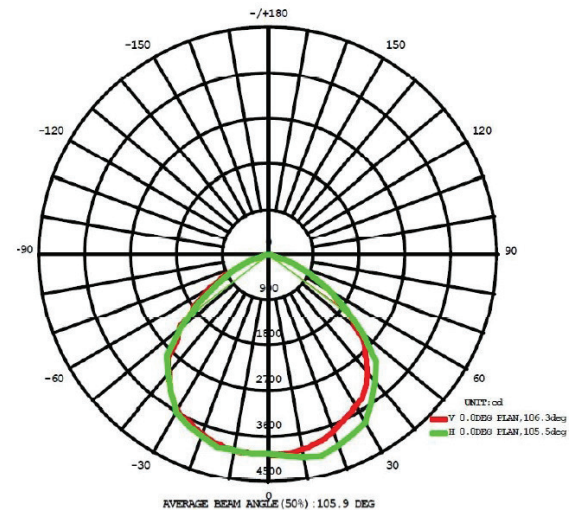

### Installation Types



Ceiling Suspension



Dimming