

Rectangle Linear Light



MAHABELL



Applications: Widely used in Commercial Lighting, Airports, Office Spaces, Educational Institutes, Hotels and Restaurants, Retail Shops, Showrooms and Malls, Banks.

Electrical Parameters

Input Voltage	100-285V AC
Rated Power	7W/Ft
Over All Power	63W
Efficiency	>90%
Power Factor	>0.90
Harmonics	< 10%

LED Details

Mounting Type	Suspended
Led Viewing Angle	120 degrees
Colour Temperature (cct)	3000k/4000k/6000k
Lumens	90 Lm/ W
Luminous Flux	5670 lm
CRI	>80

Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes


Luminary Housing Details

Body	Aluminium
Heat Sink	Aluminium IP40
Diffuser	PMMA BWF Germany


Mechanical Dimensions

Body	Aluminium
Housing	62mmX80mm


LUMINOUS INTENSITY DISTRIBUTION

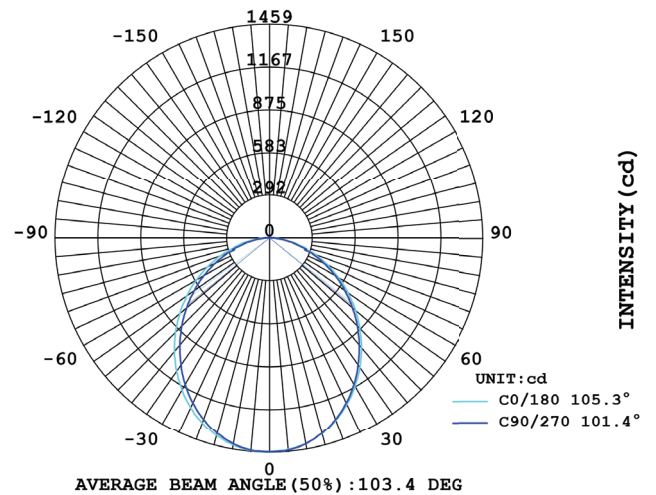

Mounting



Accessories



Optional

