

30W Triangle Panel Light



MAHABELL

Model : MB-PLTR-30W

Applications: Widely used in Offices, Hotels, Supermarkets, Shopping Malls, etc.

Electrical Parameters

Input Voltage	100-285V AC
Rated Power	30W
Efficiency	>90%
Power Factor	>0.90
Harmonics	<10%

LED Details

Mounting Type	Recess
Led Viewing Angle	110 degrees
Colour Temperature (CCT)	3000k/4000k/6500k
Lumens	98 Lm/W
Luminous Flux	2850 lm
CRI	>80

Features

- Super bright output indoor lights
- Equipped with non- flickering drivers & high lumens SMDLED chip with lens
- Long life span up to 50k hours, low decay & low maintenance
- Trim-less ABS frame with zero light leakage
- High efficiency PMMA & even light distribution
- Easy installation - Spring fastener, Ceiling Suspension, Surface mounting and Grid mounting
- Dimmable driver supports for all products

30 W

Dimension:
600mmx600mmx46.5mm

Protection Parameters

Over- Current Protection	Yes
Short- Circuit Protection	Yes
Over- Voltage Protection	Yes
IP Rating	IP20


Luminary Housing Details

Body	CRCA Enclosure
Diffuser	PC Cover


Certifications

ROHS	Yes
------	-----

Light distribution :-

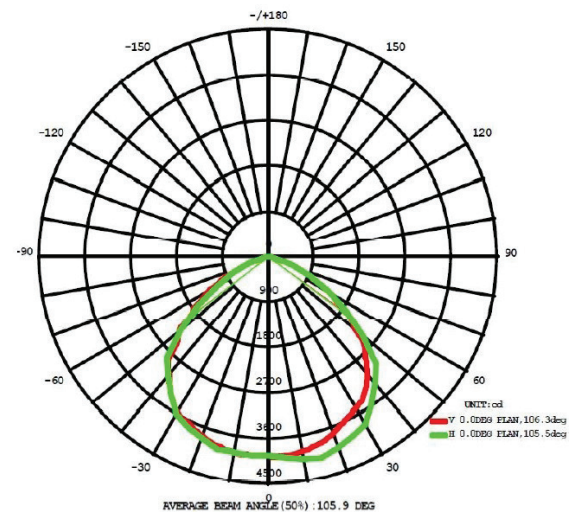

Installation Types



Ceiling Suspension

Dimming

